



9703 Conductive Adhesive Transfer Tape

Product Data Sheet

Updated : February 1996
Supersedes : January 1995

Product Description	9703 is specifically designed for bonding materials when continuity of electrical conductivity is also required across the joint.	The anisotropic nature of the conductivity - conducts only through the thickness	of the tape - allows for flexible circuitry to be joined physically and electrically, track to track without short circuiting & negligible contact resistance.
----------------------------	---	--	--

Physical Properties
Not for specification purposes

Adhesive Type	Acrylic with silver coated nickel conductive particles.	3M ref : A-40
Thickness (ASTM D-3652) Tape Liner Total	50 µm 2 Thou 130 µm 180 µm	
Release Liner	Silicone Treated Kraft paper	
Tape Colour	Clear	
Shelf Life	12 months from date of despatch by 3M when stored in the original carton at 21°C(70°F) & 50 % Relative Humidity	

Performance Characteristics
Not for specification purposes

Adhesion to Stainless Steel ASTM D-3330	Room Temp	70°C(158°F)
	1 hour 5.5 N/10mm 24 hours 6.0 N/10mm	6.6 N/10mm 7.1 N/10mm
Shear Resistance	Medium	
Temperature Performance Min : Minutes / Hours Max : Days / Weeks	170°C (338°F) 121°C (250°F)	
Solvent Resistance	Good	
UV Light Resistance	Good	

Date : February 1996
9703 Conductive Adhesive
Transfer Tape

Electrical Properties

AC Impedance 500 Hz - 100 KHz

Flat response of 0.44 Ohms

Insulation Resistance Based on ASTM D-257

3.4×10^{14} Ohms

Volume Resistivity Based on ASTM D257


17.51 Ohm-cms

Surface Resistivity Based on ASTM D257

3.3×10^{13} Ohms/Sq

AC/DC Breakdown Based on ASTM D149

Surface gap between electrodes in
transverse direction.

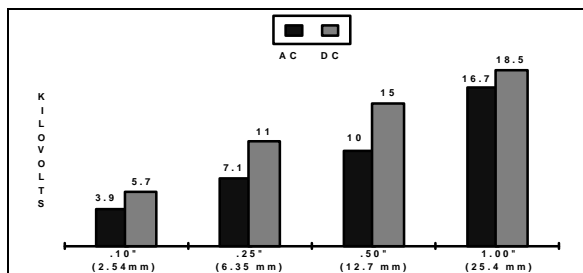

Resistance (Ohms) Kelvin Probe measurement between 1oz copper foil of the dimensions below.

	Initial	24 hrs 70°C/100% RH
1" x 1"	.049	.008
1/2" x 1/2"	.178	.048
1/4" x 1/4"	.175	.048
1/8" x 1/8"	.187	.149
1/15" x 1/15"	.245	.215

Application Techniques

1. Bond strength is dependent upon the amount of adhesive-to-surface contact developed. Firm application pressure develops better adhesive contact & thus improves bond strength.

2. To obtain optimum adhesion, the bonding

surfaces must be clean dry and well unified. A typical surface cleaning solvent is isopropyl alcohol. Use proper safety precautions for handling solvents.

3. Ideal tape application temperature range is 21°C to 38°C (70°F to 100°F).

Initial tape application to surfaces at temperatures below 10°C (50°F) is not recommended because the adhesive becomes too firm to adhere readily. However once properly applied low temperature holding is generally satisfactory.

3M is a trademark of the 3M Company.

Values presented have been determined by standard test methods and are average values not to be used for specification purposes. Our recommendations on the use of our products are based on tests believed to be reliable but we would ask that you conduct your own tests to determine their suitability for your applications. This is because 3M cannot accept any responsibility or liability direct or consequential for loss or damage caused as a result of our recommendations.

3M

Specialty Tapes & Adhesives

3M United Kingdom PLC
3M House,
28 Great Jackson Street,
Manchester,
M15 4PA

Customer Service :
Tel 0161 236 8500
Fax 0161 237 1105

3M Ireland
3M House, Adelphi Centre,
Upper Georges Street,
Dun Laoghaire, Co. Dublin,
Ireland

Customer Service :
Tel (01) 280 3555
Fax (01) 280 3509

© 3M United Kingdom PLC 1996